

AvantGuard R1200 R/RS_LC MaMo Light Bar Installation Guide

908. 996. 7210 x14

sales@machineartmoto.com

Parts:

- 1 - Left Light Bar
- 1 - Right Light Bar
- 2 - Mounting Screws & Nuts

Tools Required:

- T40 Torx Driver
- 10mm Wrench
- 13mm Wrench
- 5mm Allen Wrench


*** BEFORE BEGINNING WORK, READ THESE INSTRUCTIONS FROM START TO FINISH.**

*** PLACE BIKE ON CENTER STAND ON LEVEL GROUND.**

*** IF YOUR BIKE DOES NOT YET HAVE AUXILIARY LIGHT KIT INSTALLED, DISREGARD STEPS 1-3.**



- 1** Disconnect lights from stock mounting bracket using 5mm allen wrench and 10mm wrench. Hanging wire can be used to secure lights while mounts are replaced.

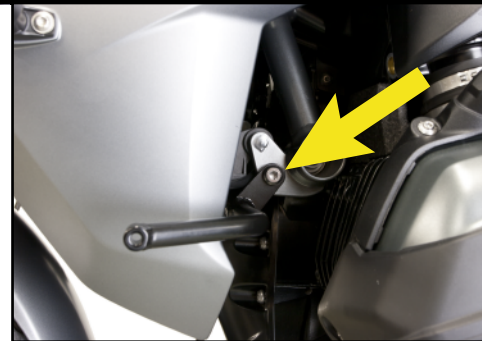

- 2** Use T40 Torx Driver and 13mm wrench to remove stock mounting bolts.



- 3** Carefully, remove stock mount.

WARNING AND DISCLAIMER: All parts manufactured, designed or sold by Machineart Moto ("MaMo") should be installed by a qualified motorcycle technician. The risk of injury is increased by improper installation or misuse of equipment. MaMo's customers must exercise good judgment in the use, control, alteration, part selection and installation, and maintenance of their motorcycles. In the event of a possible defect in material or design, or any other defect in a part manufactured, designed or sold by MaMo, the responsibility of MaMo is limited to a refund of the purchase price or the replacement of the part if MaMo determines the part to be defective, and subject to MaMo's inspection of the part within thirty (30) days from the date of purchase. (Note: any attempted repairs or modifications made to MaMo products will void this limited warranty). MaMo, under no circumstances will be responsible for incidental and/or consequential damages, property damage, personal injury damage, or damage, injury, cost or expense of any kind or nature whatsoever except as provided by law. MaMo makes no other warranty, express or implied, including without limitation any warranties of merchantability and fitness for a particular purpose.



- 4** To mount MaMo Light Kit, first determine correct orientation of parts. The left side Light Mount, must be fitted to left side of the bike and vice versa.



- 5** Position each Light Mount as shown and and secure using supplied hardware.



- 6** After Light Mounts are secure, re-mount lights using existing hardware. Be sure to position the lights correctly and check before riding.